





## FOOD SAFETY PRODUCT GUIDE



**TOGETHER, WE GET IT DONE.™**



# 1958

Born in a Pennsylvania garage  
with a single product

Now a **GLOBAL LEADER**















CRC Industries, Inc. is a global leader in the production of specialty products and formulations for the do-it-yourselfer and maintenance professional—the people who keep everyone moving forward in a world that never stops. For more than 65 years, we've been rolling up our sleeves to create products and solutions that are born from, and tested in, the important work that gets done every day around the world.

Serving the automotive, industrial, electrical, marine, heavy truck, hardware, and aviation markets, CRC trademarked brands include: CRC<sup>®</sup>, Bräkleen<sup>®</sup>, Evapo-Rust<sup>®</sup>, K&W<sup>®</sup>, Marykate<sup>®</sup>, SmartWasher<sup>®</sup>, Sta-Lube<sup>®</sup>, and Weld-Aid<sup>®</sup>.


















CRC has a rich history of innovation, driven by a core focus on identifying unmet needs in the marketplace and providing differentiated solutions for its customers. CRC has been first-to-market with many industry-leading products such as CRC Bräkleen<sup>®</sup>, the #1 selling brake parts cleaner worldwide. That passion for innovation continues today as the company creates high quality formulations that are custom-matched to specific application needs while keeping the health and safety of the user at the forefront in a highly-regulated environment.

CRC is dedicated to ensuring users have immediate access to essential documentation. We are the only company to offer the S.D.[L.]<sup>®</sup> Safety Data Label - a Safety Data Sheet printed on the reverse side of the product label, keeping critical safety information at the fingertips of the user. On Food Grade products, CRC includes a QR Code that provides instant direct access to essential documentation, including Allergen Certificates, NSF Registration Letters, Safety Data Sheets, and Food Certificates.

As an ISO (International Organization for Standardization) 9001:2015 certified manufacturer, CRC places strict controls on every step of the product development and manufacturing process; starting with the finest raw materials and continuing with consistent, quality manufacturing techniques. The benefits of achieving and maintaining ISO 9001:2015 certification reach CRC customers through the consistent conformity of its products and services, and the assurance of superior quality, environmental responsibility, safety and reliability.

 Food Safety Program . . . . . 1	 Metalworking . . . . . 26
 NSF Category Codes . . . . . 3	 Electrical Maintenance
 Food Grade H1 . . . . . 4	Electrical Precision Cleaners . . . . . 26
 Industrial Cleaners	Electrical Heavy Duty Degreasers . . . . . 27
Industrial Precision Cleaners . . . . . 9	Electrical Cable Cleaners . . . . . 28
Industrial Heavy Duty Degreasers . . . . . 12	Electrical Lubricants . . . . . 29
Water Based Cleaners . . . . . 16	 Specialty Products . . . . . 30
 SmartWasher®	 Mold Releases . . . . . 32
Parts Cleaning System . . . . . 18	 Glossary of Terms . . . . . 33
 Lubricants . . . . . 21	 Indices . . . . . 34

### PACKAGE SIZE GUIDE

 2, 6, 8, 12, 16, 20 & 24 oz aerosol can	 16 oz non-aerosol spray bottle	 2.5 oz & 4 oz tube	 6 oz & 8 oz pressurized tube with Select-a-BEAD® Nozzle	 1 gallon bottle
 12, 16 & 20 oz aerosol trigger can	 1 quart bottle	 6 oz & 8 oz pressurized tube	 carded	 1 gallon can
 16 oz aerosol can with Perma-Lock® actuator	 8 & 16 oz bottle	 12 oz & 14 oz cartridge	 1 & 5 gallon pail 35 pound pail	
 16 oz & 32 oz trigger spray bottle	 1 quart bottle	 14 oz can	 55 gallon drum 400 pound drum	
 16 oz non-aerosol can w/trigger	 8 oz & 16 oz brush-top can	 12 oz tub	 120 pound keg 275 gallon tote	

For the most up-to-date version go to [crcindustries.com](http://crcindustries.com).





## Food Safety Program

# StopLight®



**CRC StopLight®** is a visual identification labeling program designed to mitigate risk of MRO chemicals in food processing and non-production zones. It entails the application of color-coded stickers on CRC MRO chemical products, specifying permissible use areas, authorized users, and designated storage locations. These stickers offer adaptability within the program, allowing each facility to independently determine how to color-code processing areas, applications, and products in alignment with HACCP initiatives.

### Color Coding Visual Management



Cabinet Control



Stickers



Hazard Posters



# NSF CATEGORY CODES

## H1 LUBRICANTS: General incidental contact

This product is acceptable as a lubricant with incidental food contact for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used on food processing equipment as a protective anti-rust film, as a release agent on gaskets or seals of tank closures, and as a lubricant for machine parts and equipment in locations in which there is potential exposure of lubricated part to food. The amount used should be the minimum required to accomplish the desired technical effect on the equipment. If used as an anti-rust film, the compound must be removed from the equipment surface by washing or wiping, as required to leave the surface effectively free of any substance, which could be transferred to food being processed. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

## 3H FOOD PROCESSING SUBSTANCES: Release agents

This product is acceptable for use as a Release Agent on grills, ovens, loaf pans, boning benches, chopping boards, or other hard surfaces in contact with meat and poultry food products to prevent food from adhering during processing.

## A1 CLEANING PRODUCTS: General cleaners

This product is acceptable for use as a general cleaning agent on all surfaces, or for use with steam or mechanical cleaning devices in all departments. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. After using this compound, surfaces must be thoroughly rinsed with potable water. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector-In-Charge of the establishment.

## C1 NON-PROCESSING AREA PRODUCTS: General

This product is acceptable for use as a general cleaner/degreaser in inedible product processing areas, and/or exterior areas of official establishments operating under the Federal Meat, Poultry, Shell Egg Grading, and Egg Products Inspection Programs provided that it is not used to mask odors resulting from unsanitary conditions, and that any characteristic odor or fragrance does not penetrate into an edible area. Permission for the use of this compound on loading docks and other similar areas is left to the discretion of the Inspector In-Charge of the establishment.

## C3 NON-PROCESSING AREA PRODUCTS: Paint removers

The product is acceptable for use in official establishments operating under the Federal Meats and Poultry Products Inspection Program. This compound may be acceptable in areas of food processing facilities where edible products are neither processed nor stored in open containers. This category also covers paint removers and snow and ice melting products intend for use in non-processing areas.

## D2 ANTIMICROBIAL PRODUCTS: Antimicrobial agents not requiring rinse

This product is acceptable for use as a sanitizer on all surfaces not always requiring a rinse in and around food processing areas. Before using this compound, food products and packaging materials must be removed from the room or carefully protected. A potable water rinse is not required following the use of this compound on previously cleaned hard surfaces provided that the surfaces are adequately drained before contact with food so that little or no residue remains which can adulterate or have a deleterious effect on edible products. A potable water rinse is required following use of this compound under conditions other than stated above. The compound must always be used according to applicable label directions.

## E4 HAND CARE PRODUCTS: Hand lotions/cleaners- nonfood contact

The product is acceptable for use as a hand cream, lotion or cleaner in non-processing areas. The use of such products is limited to toilets, dressing rooms and other non-processing areas. Employees who handle edible products may use such compounds only when leaving the plant.

## H2 LUBRICANTS: General- no contact

This product is acceptable as a lubricant where there is no possibility of food contact in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Such compounds may be used as lubricants, release agents, or anti-rust films on equipment and machine parts or in closed systems (ex. Hydraulic systems) in locations where there is no possibility of the lubricant or lubricated part contacting edible products. The final granting of authorization for the proposed use of such compound is the responsibility of the Inspector-In-Charge of the official plant.

## K1 SOLVENT CLEANERS: Nonprocessing area product

This product is chemically acceptable as a solvent cleaner for use in non-processing areas of official establishments operating under the Federal Meat and Poultry Products Inspection Program. After using the product, equipment and utensils must be thoroughly washed with an acceptable detergent solution and rinsed with potable water to remove all traces of the cleaner before being returned to the processing area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

## K2 SOLVENT CLEANERS: Electronic instrument cleaner

This product is chemically acceptable as a solvent for cleaning electronic instruments and devices which will not tolerate aqueous cleaning solutions in official establishments operating under the Federal Meat and Poultry Products Inspection Program. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging material are re-exposed in the area. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

## K3 SOLVENT CLEANERS: Adhesives / glue removers

This product is acceptable for use as an adhesive or glue remover, for removing adhesive or glue from food packaging materials in and around food processing areas, where its use is not intended for direct food contact. Before using this compound, food products and packaging materials must be removed from the area or carefully protected. After using these compounds, all surfaces must be thoroughly washed with an acceptable detergent solution, and rinsed with potable water. This compound must be used in a manner so that all odors associated with the compound are dissipated before food products or packaging materials are re-exposed in the area.

## P1 MISC: Miscellaneous

This product is chemically acceptable for use in official establishments operating under the Federal Meat and Poultry Products Inspection Program. This compound must be used in a manner which prevents direct or indirect contamination of edible products or potable water. The final granting of authorization for the proposed use of such compounds is the responsibility of the Inspector-In-Charge of the official plant.

## M1 MOLD RELEASE AGENTS: Mold Release Agents

This product is acceptable for use as a mold release agent on molds that are used to produce packaging materials that will contact food to prevent the finished product from adhering to the mold. The amount used on the equipment should be the minimum required to accomplish the effect.

## R2 COATINGS: Coatings for use on structural surfaces

This product is acceptable for use as a coating where there is no possibility of food contact such as floors, walls, and ceilings. The coating must be applied in a manner which prevents direct or indirect contamination of edible products. Before the food product may be placed in the area where the material is being used, the area should be sufficiently free of odor to prevent product contamination. As a safety precaution, smooth coatings should not be applied to walking or standing surfaces in processing area.



CRC NSF registered H1 products are meticulously formulated to meet the highest standards of safety and performance. Trusted by professionals, these products are designed to deliver exceptional lubrication and protection in critical food processing and manufacturing environments.

CRC® Food Grade Products		Container Size	Item #	Part #
LUBRICANTS	CRC Food Grade Water Based Silicone	16 oz aerosol w/ Perma-Lock®	1003289	03035
	CRC Food Grade White Grease	16 oz aerosol w/ Perma-Lock®	1003292	03038
	CRC Food Grade Silicone Trigger	16 oz non-aerosol	1003294	03039
	CRC Food Grade Silicone	16 oz aerosol w/ Perma-Lock®	1003296	03040
		5 Gal	1003298	03041
		55 Gal	1003299	03042
	CRC Food Grade Syntha-Tech™ Lubricant with PTFE	16 oz aerosol w/ Perma-Lock®	1003310	03054
	CRC Food Grade Chain Lube	16 oz aerosol w/ Perma-Lock®	1003313	03055
	CRC Food Grade Belt Dressing	16 oz aerosol w/ Perma-Lock®	1003326	03065
	CRC Food Grade Machine Oil	16 oz aerosol w/ Perma-Lock®	1003343	03081
	CRC Food Grade Dielectric Grease	16 oz aerosol w/ Perma-Lock®	1003346	03082
	CRC Food Grade Dielectric Grease with Select-a-BEAD® Nozzle	6 oz pressurized can	1003353	03085
	CRC Food Grade Penetrating Oil	16 oz aerosol w/ Perma-Lock®	1003355	03086
CRC Food Grade Air Tool Oil	1 Quart Bottle	1007792	SL2300	
CRC Food Grade Anti-Seize & Lubricating Compound	8 oz BrushTop Bottle	1007942	SL35905	
	16 oz BrushTop Bottle	1007944	SL35906	
GREASES	CRC Food Grade Multi Purpose Grease	14 oz cartridge	1007924	SL35600
		35 lb pail	1007925	SL35605
	CRC Food Grade Synthetic Grease	14 oz cartridge	1007928	SL35610
	CRC Food Grade Extreme Duty Grease	14 oz cartridge	1007931	SL35615

## FOOD GRADE WATER BASED SILICONE H1

Non-flammable, NSF H1 Registered multi-purpose silicone spray for food processing and handling applications. It forms a white emulsion that is odorless and non-staining. It lubricates and protects in most metal to non-metal applications. Water Based Silicone is a silicone-rich formula that eliminates binding and sticking, while protecting most surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
03035	1003289	1003288	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE WHITE GREASE H1

A high-purity, high-quality aluminum complex grease that provides superior lubrication and durability in many food and pharmaceutical processing applications. Designed for heavy load applications requiring a long grease life. Protects equipment against rust, oxidation and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03038*	1003292	1003291	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE SILICONE H1

Multi-purpose silicone spray for food processing and handling applications. It forms a colorless, odorless, non-staining film that lubricates and insulates in most metal to non-metal applications. Silicone film eliminates binding and sticking, while protecting most surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
03039 <sup>3*</sup>	1003294	1003293	16 oz non-aerosol trigger can	12
03040*	1003296	1003295	16 oz aerosol w/Perma-Lock®	12
03041 <sup>3*</sup>	1003298	1003298	5 gal pail	1
03042 <sup>3*</sup>	1003299	1003299	55 gal drum	1



## FOOD GRADE CHAIN LUBE H1

A special blend of synthetic lubricants and mineral oil designed to keep roller drive and conveyor chains lubricated. It is specifically designed to provide the convenience of aerosol application where incidental food contact may occur. Food Grade Chain Lube penetrates, lubricates and protects moving parts by reducing friction and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03055	1003313	1003312	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE MACHINE OIL H1

Extremely efficient and effective general purpose lubricant for use on food processing equipment. Food Grade Machine Oil penetrates and loosens rust, scale, dirt and corrosion to free parts and fasteners.

Part#	Item#	Case/Order#	Size	Units/cs
03081	1003343	1003342	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE SYNTHA-TECH™ LUBRICANT WITH PTFE H1

A unique blend of synthetic lubricants that utilizes PTFE, anti-wear and extreme pressure additives to increase equipment life and performance. This food-grade synthetic lubricant is NSF H1 Registered for use in meat and poultry facilities. Additionally, its long-lasting film minimizes surface contact, thereby extending lubricating intervals.

Part#	Item#	Case/Order#	Size	Units/cs
03054	1003310	1003309	16 oz aerosol w/Perma-Lock®	12



## FOOD GRADE BELT DRESSING H1

Provides a temporary, food-grade, synthetic treatment for worn belts. Extends belt life by reducing slippage, hardening, glazing, dirt build-up and friction. Belt Dressing can be used on leather, rubber, canvas or fabric, and is ideally suited for flat, round and V-belts. Improves traction and reduces belt tension, relieving stress on motors, shafts and wheels for improved operating efficiency.

Part#	Item#	Case/Order#	Size	Units/cs
03065*	1003326	1003325	16 oz aerosol w/Perma-Lock®	12



\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.  
3 - Not for retail sale, for use in manufacturing establishments only.

### FOOD GRADE DIELECTRIC GREASE **H1**

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants. NSF H1 Registered.

Part#	Item#	Case/Order#	Size	Units/cs
03082*	1003346	1003345	16 oz aerosol w/Perma-Lock®	12



### FOOD GRADE DIELECTRIC GREASE **H1**

Lubricates, waterproofs and insulates with a thin, non-curing silicone compound. Dielectric Grease also provides an exceptional lubricant for fasteners used to support temporary electrical work. Excellent for lubricating and sealing rubber and plastic parts – including o-rings. Great for use in food processing environments where there may be a chance of incidental food contact.

Part#	Item#	Case/Order#	Size	Units/cs
03085	1003353	1003352	6 oz pressurized can w/ Select-A-BEAD® Nozzle	12



### FOOD GRADE PENETRATING OIL **H1**

An effective and efficient general purpose penetrant for use on food processing equipment. The highly refined white mineral oil is colorless and odorless to meet NSF and FDA standards. Food Grade Penetrating Oil can be used to loosen rust, scale and corrosion around fasteners and hose fittings on food processing equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03086	1003355	1003354	16 oz aerosol w/Perma-Lock®	12



### FOOD GRADE AIR TOOL OIL **H1**

A fully synthetic food-grade oil that is formulated with the highest quality polyalphaolefin (PAO) base oil to meet the lubrication requirements of air line equipment.

Part#	Item#	Case/Order#	Size	Units/cs
SL2300	1007792	1007791	1 qt bottle	6



### FOOD GRADE ANTI-SEIZE & LUBRICATING COMPOUND **H1**

A premium anti-seize compound developed specifically for use in applications where incidental food contact is possible. Composed entirely of ingredients that meet NSF H1 requirements. Protects metal parts from seizure, galling, rust, corrosion and heat freeze by tenaciously adhering to the metal surface. Protects parts up to 1800°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35905	1007942	1007941	8 oz brush-top bottle	12
SL35906	1007944	1007943	16 oz brush-top bottle	12



FOOD GRADE

LUBRICANTS

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

# FOOD GRADE LUBRICANTS

PRODUCT	Base Type	Film Type	Color	Perma-Lock® Actuator	Flash Point (F)	NSF Category Code	Container Size
Food Grade Water-Based Silicone	Silicone	Non-drying	White	Yes	None	H1	
Food Grade White Grease	Aluminum Complex	Non-drying Grease	White	Yes	17.6°F	H1	
Food Grade Silicone	Silicone	Dry, Non-Hardening	Clear	Yes	<0°F	H1	   
Food Grade Syntha-Tech™ Lubricant with PTFE	Polyolefin/PTFE	Non-drying	White	Yes	117°F	H1	
Food Grade Chain Lube	Mineral Oil	Non-drying, Ultra-thin, Oily	Clear	Yes	>370°F	H1	
Food Grade Belt Dressing	Polyisobutene	Tacky, Non-Drying	Light Amber	Yes	<0°F	H1	
Food Grade Machine Oil	Mineral Oil	Non-drying	Clear	Yes	200°F	H1	
Food Grade Dielectric Grease	Silicone	Non-Curing Silicone Paste	Translucent to Opaque Gel Paste	No	<20°F	H1	
Food Grade Dielectric Grease	Silicone	Paste	White	No	>572°F	H1	
Food Grade Penetrating Oil	Mineral Oil	Non-drying	Clear	Yes	200°F	H1	
Food Grade Air Tool Oil	Polyalphaolefin	Non-drying	Clear	No	464°F	H1	
Food Grade Anti-Seize	Polyisobutylene	Wet	Opaque Off-White Semi-Solid Paste	N/A	445°F	H1	 

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.



## ALUMINUM COMPLEX-BASED H1

### FOOD GRADE MULTI-PURPOSE GREASE

NSF H1 Registered. Aluminum complex, NLGI-2 grease. Meets FDA regulation 21 CFR 178.3570 for incidental food contact. Appropriate for food processing and handling equipment. Will not pound out of bearings and bushings during shock loads.

Part#	Item#	Case/Order#	Size	Units/cs
SL35600	1007924	1007923	14 oz cartridge	10
SL35605	1007925	1007925	35 lb pail	1



## SILICA H1

### FOOD GRADE SYNTHETIC GREASE

NSF H1 Registered for incidental food contact. NLGI-2 lubricating grease formulated with the highest quality synthetic NSF registered raw materials available. Performs extremely well in cold temperature applications, as the base fluid exhibits a very low pour point. Resists rust and oxidation. Water wash-down resistant. Wide temperature range – provides superior lubrication from -30°F to 450°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35610	1007928	1007927	14 oz cartridge	10



## CALCIUM SULFONATE H1

### FOOD GRADE EXTREME DUTY GREASE

NSF H1 Registered for incidental food contact. NLGI-2 high performance lubricating grease excels in applications where resistance to water wash-out and broad operating temperatures are absolutely necessary. Provides unsurpassed resistance to extreme pressures and corrosion, including salt spray. Timken OK Load of 60 lbs. Wide temperature range – provides superior lubrication from -20°F to 400°F.

Part#	Item#	Case/Order#	Size	Units/cs
SL35615	1007931	1007930	14 oz cartridge	10



NSF H1 Food Grade Grease	NSF Registration	NLGI Grade	Base Oil	Base Oil Viscosity@40°C	Thickener	Drop Point °F	Worked Penetration
Food Grade Multi-Purpose Grease	H1	2	Mineral	100-140	Aluminum Complex	500	265-295
Food Grade Synthetic Grease	H1	2	PAO	60-65	Silica	None	265-295
Food Grade Extreme Duty Grease	H1	2	Mineral	90-110	Calcium Sulfonate	600	265-295

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

FOOD GRADE

LUBRICANTS

GREASES

## CONTACT CLEANER 2000® K2

### Precision Cleaner

An aggressive general-purpose precision cleaner that effectively removes dirt, light oils and other contaminants. It evaporates quickly, leaves no residue and has no flash point. Not recommended for use on Noryl® or polycarbonate type plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03150 <sup>1</sup>	1003419	1003418	16 oz aerosol	12



## PF PRECISION CLEANER K2

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03190 <sup>1</sup>	1003447	1003446	16 oz aerosol	12



## NT™ PRECISION CLEANER K2

Patented formula NT™ Precision Cleaner effectively removes dirt, light oils and other contaminants from electronic equipment. It evaporates quickly and leaves no residue. NT™ Precision Cleaner has no flash point and is an optimal alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern.

Part#	Item#	Case/Order#	Size	Units/cs
03205 <sup>1</sup>	1003461	1003460	16 oz aerosol	12



## ELECTRONIC COMPONENT CLEANER K2

### Precision Cleaner

Aggressive cleaner for use on electronic components in industrial, electrical and aviation applications. Its high-purity, fast-penetrating formula aggressively dissolves dust, lint, dirt, oils, polar soils and other contaminants from most non-plastic surfaces. It evaporates very rapidly and leaves no residue.

Part#	Item#	Case/Order#	Size	Units/cs
03200 <sup>1</sup>	1003455	1003454	16 oz aerosol	12



## XT-2000™ PRECISION CLEANER K2

A non-flammable, low-odor and rapidly evaporating precision cleaner for use in electrical and industrial applications. Effectively removes dirt, light oils and other contaminants from electronic equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03155 <sup>1</sup>	1003425	1003424	16 oz aerosol	12



## QD® CONTACT CLEANER P1

A petroleum distillate and alcohol-blended precision cleaner suitable for cleaning sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03130 <sup>1</sup>	1003407	1003406	16 oz aerosol	12
03131 <sup>*1</sup>	1003408	1003408	5 gal pail	1
03132 <sup>*1</sup>	1003409	1003409	55 gal drum	1



## CONTACT CLEANER K2

Advanced Technology Formula Contact Cleaner does not contain known ozone depleting substances or VOCs. It provides an optimal alternative to CFC, HCFC, and flammable contact cleaners. Regular use will help prevent electrical failure, increase performance and prolong equipment life. Contact Cleaner will not damage sensitive modern plastics such as Noryl®, ABS and Lexan®.

Part#	Item#	Case/Order#	Size	Units/cs
03070 <sup>1</sup>	1003333	1003332	16 oz aerosol	12



## CE™ PRECISION CLEANER K2

Designed specifically for dissolving and flushing away carbon dust, polar soils, mineral oils and non-polar soils found in elevator rooms and vertical lifts. CE™ Precision Cleaner has a controlled evaporation rate, providing sufficient dwell time to dissolve and flush dirt from surfaces before evaporating without leaving a residue.

Part#	Item#	Case/Order#	Size	Units/cs
14035 <sup>1</sup>	1004776	1004775	16 oz aerosol	12



<sup>1</sup> – 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

Noryl® and Lexan® are registered trademarks of SABIC GLOBAL TECHNOLOGIES B.V.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## ISOPROPYL ALCOHOL K1 K2

### Precision Cleaner

A quick-drying light-duty precision cleaner for use in electronic and aviation applications. Its 99% pure formula aggressively dissolves grease, dust, dirt, lint, oils and flux.

Part#	Item#	Case/Order#	Size	Units/cs
03201	1003457	1003456	16 oz aerosol	12



## FOOD GRADE CONTACT CLEANER P1

Contact cleaner suitable for cleaning sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics. NSF P1 Registered for use in meat and poultry plants.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1750989*	1750988	16oz aerosol w/ Perma-Lock®	12



## HF™ CONTACT CLEANER K2

Petroleum distillate-based precision cleaner that offers the safety of a high flash point without leaving a residue. It may be used on most plastic materials.

Part#	Item#	Case/Order#	Size	Units/cs
03125*	1003404	1003403	16 oz aerosol	12



## DUSTER™ K2 Aerosol Dust Removal System

Safely removes dust from energized equipment without damaging sensitive components or surface finish. Penetrates into cracks and crevices to remove contaminants that normal hand dusting cannot reach. It delivers a powerful blast that removes embedded debris. The extension tube can be used for more precise delivery. Energized equipment use only. Non-flammable and plastic safe.

Part#	Item#	Case/Order#	Size	Units/cs
14085	1004818	1004817	12 oz aerosol trigger	12



## CONTACT CLEANER & PROTECTANT K2

High-purity precision cleaner that helps make equipment perform like new. Penetrates surface pores, cleans away contaminants and leaves a fine microscopic corrosion resistant film.

Part#	Item#	Case/Order#	Size	Units/cs
03140*	1003417	1003416	16 oz aerosol	12



- 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

# INDUSTRIAL PRECISION CLEANERS

PRODUCT	Base Type	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	Plastic Safe	SDS Label Attached	NSF Category Code	VOC % <sup>∞</sup>	Container Size
Contact Cleaner 2000® Precision Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
XT-2000™ Precision Cleaner	DCE/HFE	None	Fast	27,780 Volts	Safe on Most Plastics (test small area)	Yes	K2	23.4	
Contact Cleaner	HFE	None	Very Fast	28,750 Volts	Yes	Yes	K2	0	
PF Precision Cleaner	HFE	None	Very Fast	26,360 Volts	Yes	Yes	K2	6	
Electronic Component Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
NT™ Precision Cleaner	DCE/HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
QD® Contact Cleaner	Hydrocarbon Solvents	16°F (aerosol) <0°F (bulk)	Very Fast	39,500 Volts (aerosol) 30,500 volts (bulk)	Yes	Yes	P1	74.9	  
CE™ Precision Cleaner	HFC	None	Slow	28,400 Volts	Safe on Most Plastics (test small area)	Yes	K2	16.3	
Isopropyl Alcohol Precision Cleaner	Alcohol	54°F	Very Fast	8,300 Volts	Safe on Most Plastics (test small area)	Yes	K1, K2	74.3	
HF™ Contact Cleaner	Petroleum Distillate	204°F	Slow	45,700 Volts	Safe on Most Plastics (test small area)	Yes	K2	0	
Contact Cleaner & Protectant	Isohexane/Silicone	<0°F	Moderate	350 Volts	Safe on Most Plastics (test small area)	Yes	K2	71.9	
Duster™ Aerosol Dust Removal System	HFC	None	Very Fast	N/A	Yes	No	K2	0	
Food Grade Contact Cleaner	Heptane	16°F	Very Fast	39,500 Volts	Yes	No	P1	74.9	

<sup>∞</sup> – VOC % as defined by Consumer Products VOC regulations

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## SUPER DEGREASER™ MUO **K1**

Non-conductive, non-corrosive, non-staining and has no flash point. Advanced Technology Formula Super Degreaser™ quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Super Degreaser™ evaporates rapidly and leaves no residue. It is an optimal alternative to 1,1,1-Trichloroethane products. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03910 <sup>3</sup>	1003514	1003513	20 oz aerosol (MUO)	12



## SUPER DEGREASER™ PLUS **K1**

Non-conductive, non-corrosive, non-staining and has no flash point. High cleaning strength quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. Evaporates quickly and leaves no residue.

Part#	Item#	Case/Order#	Size	Units/cs
03109 <sup>1</sup>	1003380	1003379	20 oz aerosol	12



## HEAVY DUTY DEGREASER **K1**

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances to increase operating efficiency of equipment. Heavy Duty Degreaser offers quick and efficient degreasing action and fast evaporation with no residue and no flash point. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03095 <sup>1</sup>	1003364	1003363	20 oz aerosol	12
03995 <sup>3</sup>	1003521	1003520	20 oz aerosol (MUO)	12



## T-FORCE® DEGREASER **K1**

A revolutionary formula with high-performance and industrial-strength degreasing. T-Force® Degreaser is non-conductive, non-corrosive, non-staining and has no flash point. It quickly dissolves grease, oil and sludge for more efficient operation of mechanical equipment. T-Force® Degreaser evaporates rapidly, leaves no residue and has a good health and safety profile. Does not contain nPB, TCE or Perc.

Part#	Item#	Case/Order#	Size	Units/cs
03116 <sup>3</sup>	1003392	1003391	1 gal can	4
03117 <sup>3</sup>	1003393	1003393	5 gal pail	1
03118 <sup>3</sup>	1003394	1003394	55 gal drum	1
03915 <sup>3</sup>	1003516	1003515	20 oz aerosol (PowerJet® MUO)	12
03916 <sup>3</sup>	1007981	1003517	20 oz aerosol (Non-flammable MUO)	12



## T-FORCE® NEXT GENERATION DEGREASER **K1**

Combines the power of a high-performance, industrial-strength degreaser with lower VOCs. It is non-conductive, non-corrosive and non-staining and has no flash point.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1750018 <sup>1</sup>	1750016	20 oz aerosol	12



1 – Item restricted from sale in some states and counties. See product page on CRC website for specific restrictions.

3 – Not for retail sale, for use in manufacturing establishments only.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## QUICK CLEAN™ **K1**

### Safety Solvent and Degreaser

Effective heavy-duty degreaser provides strong degreasing action, fast evaporation and no residue. It is non-flammable and does not contain VOCs. Use with caution on plastics and paints. Test on a small area before use.

Part#	Item#	Case/Order#	Size	Units/cs
03180 <sup>1</sup>	1003437	1003436	20 oz aerosol	12



## CITRUS DEGREASER **C1**

A unique heavy-duty degreaser that is extremely effective for dissolving and removing grease, oil, lubricants and contaminants without requiring water wash off and without leaving a residue. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14170 <sup>3</sup>	1004861	1004860	20 oz aerosol	12
14970 <sup>3*</sup>	1005158	1005157	20 oz aerosol (MUO)	12
14171 <sup>3</sup>	1004863	1004862	16 oz non-aerosol can w/trigger	12
14172 <sup>3</sup>	1004865	1004864	1 gal bottle	4
14174 <sup>3</sup>	1004867	1004867	55 gal drum	1



## CHLOR-FREE® DEGREASER **K1**

Innovative heavy-duty non-chlorinated degreasing solvent that removes oil, grease and other contaminants. Excellent for use where rapid turn-around is necessary and low flash point solvents can be used.

Part#	Item#	Case/Order#	Size	Units/cs
03185 <sup>1*</sup>	1003441	1003440	20 oz aerosol	12
03985 <sup>3*</sup>	1003519	1003518	20 oz aerosol (MUO)	12
03189 <sup>3*</sup>	1003445	1003444	16 oz non-aerosol w/trigger	12



## NATURAL DEGREASER™ **C1**

### Citrus Based Degreaser

Specially formulated degreaser that offers the natural cleaning power of citrus. It does not require water wash-off, and does not leave a sticky residue commonly associated with citrus-based cleaners. Natural Degreaser™ Citrus Based Degreaser contains no chlorinated solvents. Use with caution on plastics and paints.

Part#	Item#	Case/Order#	Size	Units/cs
14005	1004762	1004761	20 oz aerosol	12



**NEW**

## CHLOR-FREE® UNIVERSAL DEGREASER **K1**

A 50-state compliant, low VOC, and non-chlorinated degreaser for use in industrial applications. This new and innovative product aggressively dissolves grease, dirt and oils for effective cleaning of surfaces. The fast evaporation provides rapid turn-around when a low flashpoint is acceptable. The PowerJet® Spray Nozzle penetrates and blasts away contaminants quickly.

Part#	Item#	Case/Order#	Size	Units/cs
N/A	1753974	1753975	20 oz aerosol	12



## HEAVY DUTY DEGREASER II **K1** **K2**

An excellent alternative for cleaning applications where chlorinated solvents are not acceptable. Heavy Duty Degreaser II effectively removes soils and cleans surfaces without residue build-up. Use with caution on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
03120	1003398	1003397	20 oz aerosol	12



## MECH FORCE™ **K1**

### Industrial Degreaser

An innovative, non-chlorinated heavy-duty degreaser that removes oil, grease and other contaminants. This fast-evaporating solvent is excellent for use where rapid turn-around is necessary and low flash point solvents can be used. It offers a high permissible exposure limit.

Part#	Item#	Case/Order#	Size	Units/cs
03151 <sup>1</sup>	1003421	1003420	20 oz aerosol	12



<sup>3</sup> - 360° spray valve can be sprayed in the UP or DOWN position.

<sup>1</sup> - Item restricted from sale in some states. See product page on CRC website for specific restrictions.


<sup>3</sup> - Not for retail sale, for use in manufacturing establishments only.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## FOAMING COIL CLEANER A1 C1

High-performance, heavy-duty foaming detergent designed to clean evaporator and condenser coils. The aggressive alkaline detergent blend quickly cuts through dirt, grease, oil and other types of residue. Low-odor formula.

Part#	Item#	Case/Order#	Size	Units/cs
03196 	1003453	1003452	20 oz aerosol	12



## GASKET REMOVER C3

Paint and Decal Remover

Solvent-based, high-strength cleaner that removes baked-on fiber gaskets, gasket adhesives and sealants. Dissolves and aids in the removal of paints, lacquers and varnish. Removes graffiti from metal and stone.

Part#	Item#	Case/Order#	Size	Units/cs
03017	1003266	1003265	16 oz aerosol	12



## INDUSTRIAL ADHESIVE REMOVER K3


Ideal for removing adhesive residue, tar, wax or other contaminants. Its penetrating formula can help remove stubborn labels and tape from multiple surfaces. VOC compliant in all 50 states<sup>∞</sup>.

Part#	Item#	Case/Order#	Size	Units/cs
03250	1003473	1003472	20 oz aerosol	12



INDUSTRIAL CLEANERS



 – 360° spray valve can be sprayed in the UP or DOWN position.  
<sup>∞</sup> – As defined by Consumer Products VOC regulations.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

# INDUSTRIAL HEAVY DUTY DEGREASERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	VOC % <sup>∞</sup>	NSF Category Code	SDS Label Attached	Container Size
Super Degreaser™ Plus	DCE/HFE	31	None	Fast	25,790 Volts	49.8	K1	Yes	
Super Degreaser™ MUO	DCE/HFE	125	None	Fast	26,800 Volts	96.12 (MUO)	K1 (MUO)	Yes	
Heavy Duty Degreaser	Chlorinated	95	None	Fast	15,710 Volts	7.8	K1	Yes	
T-Force® Degreaser Non-Flammable MUO	DCE/HFE	75	None	Fast	27,510 Volts	72	K1	Yes	
T-Force® Degreaser MUO	DCE/HFE	91	None	Fast	29,010 Volts	81.6	K1	Yes	
T-Force® Next Generation Degreaser	DCE/HFE	31	None	Fast	25,790 Volts	49.8	K1	Yes	
T-Force® Degreaser	DCE/HFC	91	None	Fast	29,100 Volts	85	K1	No	
Quick Clean™ Safety Solvent and Degreaser	Chlorinated	95	None	Very Fast	37,500 Volts	0	K1	Yes	
Chlor-Free® Degreaser	Blend of non-chlorinated organic solvents	106	<0°F	Fast	6,000 Volts (aerosol) 20,800 Volts (non-aerosol) 20,800 Volts	46.3 (aerosol) 100 (non-aerosol) 96 (MUO)	K2 K2 K1	Yes Yes Yes	
Chlor-Free® Universal Degreaser	Organic Solvent/ Alcohol	139	-4.0°F	Fast	ND	9.5%	K1	Yes	
Mech Force™	Blend of non-chlorinated organic solvents	>200	<0°F	Fast	6,600 Volts	46	K1	Yes	
Citrus Degreaser	d-limonene & Petroleum Distillate	32	170°F	Slow	58,600 Volts	9.8	C1	Yes	
Citrus Degreaser Bulk & MUO	d-limonene & Petroleum Distillate	54	100°F	Fast	35,000 Volts	96.5 (MUO) 100 (bulk)	C1	No (bulk) Yes (MUO)	
Natural Degreaser™	Glycol Ether	>200	150°F	Slow	28,600 Volts	9.7	C1	Yes	
Heavy Duty Degreaser II	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K1, K2	Yes	
Gasket Remover	Organic Solvents	N/A	56°F	Fast	N/A	47.5	C3	Yes	
Foaming Coil Cleaner	Water-Based	N/A	None	Slow	N/A	10.2	A1, C1	Yes	
Industrial Adhesive Remover	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K3	Yes	

NA = Not Applicable; KB = Kauri Butanol; ND = Not Determined  
<sup>∞</sup> – VOC % as defined by Consumer Products VOC regulations

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

### HYDROFORCE® INDUSTRIAL STRENGTH DEGREASER C1

Aqueous degreaser with the powerful performance of a solvent. Upon contact, HydroForce® Industrial Strength Degreaser instantly begins to hunt-down, break-up and lift-off heavy deposits of grease, oil and dirt. It exhibits a unique spreadability. Perfect for facilities seeking an alternative to traditional solvents.

Part#	Item#	Case/Order#	Size	Units/cs
14415 <sup>1</sup>	1004970	1004969	32 oz trigger spray bottle	12



### HYDROFORCE® BUTYL-FREE ALL PURPOSE CLEANER C1 A1

Butyl-free cleaner that is versatile enough for all of your cleaning tasks, but strong enough to attack and remove tough dirt, dust and grime deposits. Perfect for facilities seeking an efficient all-purpose cleaner with maximum regulatory compliance.

Part#	Item#	Case/Order#	Size	Units/cs
14401	1004949	1004948	32 oz trigger spray bottle	12



### HYDROFORCE® ALL PURPOSE DEGREASER C1

Versatile enough to use for all degreasing tasks. HydroForce® All Purpose Degreaser breaks-up and lifts-off grease, oil and dirt deposits. Perfect for facilities seeking an improvement over their current all-purpose aqueous degreaser.

Part#	Item#	Case/Order#	Size	Units/cs
14406	1004956	1004955	20 oz aerosol	12
14407 <sup>1</sup>	1004958	1004957	32 oz trigger spray bottle	12



### HYDROFORCE® GLASS CLEANER C1 Professional Strength

Versatile enough to use on your most delicate glass surfaces, but strong enough to quickly cut through the toughest dirt, dust, fingerprint and haze deposits without streaking. Its ammonia-fortified formula contains a foaming agent for greater coverage and less run-off when cleaning vertical surfaces.

Part#	Item#	Case/Order#	Size	Units/cs
14412	1004966	1004965	20 oz aerosol	12



### HYDROFORCE® ZERO VOC A1 General Purpose Cleaner

Provides maximum regulatory compliance without performance compromises. It is strong enough to attack and remove tough dirt, dust and grime deposits; yet its moderate pH formula, and zero VOC content make it versatile and safer to use daily for all your cleaning tasks. Formulated with a special polymer that keeps dirt and greasy soils from returning to surfaces.


Part#	Item#	Case/Order#	Size	Units/cs
14446	1004990	1004989	32 oz trigger spray bottle	12



### HYDROFORCE® SUPER CITRUS™ HEAVY DUTY DEGREASER C1

Naturally formulated degreaser that offers the superb cleaning power of citrus. HydroForce® Super Citrus™ Heavy Duty Degreaser dissolves grease, oil, ink, tar, asphalt and many other industrial residues.

Part#	Item#	Case/Order#	Size	Units/cs
14440	1004984	1004983	20 oz aerosol	12
14441	1004986	1004985	1 gal bottle	4
14443	1004988	1004988	55 gal drum	1



### HYDROFORCE® STAINLESS STEEL CLEANER & POLISH C1

Using an exclusive ultra-shine formula, HydroForce® Stainless Steel Cleaner & Polish eliminates dirt, dust, fingerprints and watermarks and leaves behind a protective, non-greasy barrier that resists the return of these stains. Created specifically for industrial applications, Stainless Steel Cleaner is formulated with powerful cleaning agents designed to out-clean, out-shine and out-perform competing janitorial stainless steel cleaners.

Part#	Item#	Case/Order#	Size	Units/cs
14424	1004977	1004976	20 oz aerosol	12



### HYDROFORCE® GERMICIDAL FOAM CLEANER C1

Cleans, disinfects and deodorizes in one easy step. The rich, foamy aqueous based formula clings to vertical or inverted surfaces without runs or drips. HydroForce® Germicidal Foam Cleaner contains powerful cleaning agents that instantly lift off and eliminate dirt, dust, grease and grime. For sale in U.S. and Puerto Rico only.

Part#	Item#	Case/Order#	Size	Units/cs
14430	1004982	1004981	20 oz aerosol	12



1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

# WATER BASED CLEANERS

PRODUCT	Base Type	pH	Flash Point (F)	NSF Category Code	Odor	Container Size
HydroForce® Industrial Strength Degreaser	Alkaline H <sub>2</sub> O Surfactant	13.1	None	C1	Pleasant	32
HydroForce® All Purpose Degreaser	H <sub>2</sub> O Surfactant	10.7 (aerosol) 10.2 (bulk)	None	C1	Pleasant	20 32
HydroForce® Zero VOC General Purpose Cleaner	H <sub>2</sub> O Surfactant	10.3	None	A1	Mild Detergent	32
HydroForce® Butyl-Free All Purpose Cleaner	H <sub>2</sub> O Surfactant	12.2	None	A1, C1	Surfactant	32
HydroForce® Super Citrus™ Heavy Duty Degreaser	Solvent in H <sub>2</sub> O Emulsion (aerosol) Solvent Based Dilutable in H <sub>2</sub> O (bulk)	10 (aerosol)	None (aerosol) 190°F (bulk)	C1	Citrus	20 1 55
HydroForce® Glass Cleaner Professional Strength	H <sub>2</sub> O Surfactant	10.5	None	C1	Ammonia	20
HydroForce® Germicidal Foam Cleaner	H <sub>2</sub> O Surfactant	12.3	53°F	C1	Fruity	20
HydroForce® Stainless Steel Cleaner & Polish	Solvent/Oil in H <sub>2</sub> O Emulsion	10.5	None	C1	Mild Petroleum	20



Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

# THE CRC SMARTWASHER® A SMARTER & SAFER SOLUTION

The CRC SmartWasher® is a manual parts washer that replaces traditional solvent or aqueous alternatives. Its non-hazardous, non-flammable, water-based degreasing solution offers superior cleaning performance that's just as powerful as solvent-based solutions, and it's safer for the user.

The CRC SmartWasher® meets the parts cleaning needs of modern businesses, while eliminating the hassle and cost of solvent waste disposal. The natural process of bioremediation breaks down and converts oil, grease and carbon-based contaminants into harmless by-products of CO<sub>2</sub> and water.

The bioremediation process reduces liquid hazardous waste streams and reduces the release of harmful pollutants into the environment.



INDUSTRIAL CLEANERS

SMARTWASHER®

## AN EASY & EFFECTIVE 3-STEP SOLUTION

1



### The SmartWasher®

A high-quality, durable Parts Washer that heats the OzzyJuice® fluid and allows for the magic of bioremediation to take place. Designed specifically for heavy duty applications, with the flexibility to suit almost any working environment.

2



### The OzzyJuice®

A water-based, industrial strength, pH neutral, non-corrosive and non-flammable cleaning fluid for use in the CRC SmartWasher® system. The advanced OzzyJuice® formula cleans as well, if not better, than traditional solvent technologies. All OzzyJuice® solutions are NSF A1 Registered.

3



### The OzzyMat®

A revolutionary, Multi-Layer Filter Mat that not only traps particulates, but most importantly contains the advanced Microbes that will fall into the OzzyJuice® solution as it passes through. The microbes then get to work breaking down and cleaning the fluid so it can be re-used over and over again.

## CERTIFICATION & APPROVALS

The SmartWasher® system is a safer and highly-effective alternative to manual solvent and aqueous-based parts washers. It makes operations better and safer for the user and the environment. All OzzyJuice® solutions used in the SmartWasher® are non-corrosive, pH-neutral, non-flammable and non-hazardous. When used in accordance with directions, the SmartWasher® system does not generate hazardous waste or potential for cradle-to-grave legal liability.

### Clean Air Solvent Certificate

OzzyJuice® products certified "Clean Air Products" by SCAQMD (South Coast Air Quality Management District) include SW-3, SW-4, SW-7, and SW-8.

### Meets US EPA Safer Product Standards

OzzyJuice® SW-4 and OzzyBooster® Microbial Enhancer have been awarded the SAFER CHOICE label and seal of approval by the EPA.

### NSF Registered Products

All OzzyJuice® formulas are registered A1 for use in food manufacturing facilities.





## SW-23 MOBILE PARTS/BRAKE WASHER

SW-23 – fits every application with its unique design and features, large sink size, and mobility. It includes an extra long angled brush/hose for those hard to reach places and a customized dolly with a footstep for easy movement.

Part#	Case/Order#	Unit Size	Units/cs
14161	1004858	43"H x 42"W x 27"D	1

## SW-25 SIGNATURE PARTS WASHER

SW-25 – features toggle switch controls, a flow control timer, adjustable thermostat, larger capacity stationary unit.

Part#	Case/Order#	Unit Size	Units/cs
14145	1004852	43"H x 35"W x 26"D	1

## SW-28 SUPERSINK PARTS WASHER

SW-28 – loaded with features and includes an extra large work surface for all jobs. A second workstation can easily be added allowing two people to work at the same time.

Part#	Case/Order#	Unit Size	Units/cs
14144	1004851	47"H x 42"W x 38"D	1

## SW-28XE SUPERSINK XE PARTS WASHER

SW-28XE – fully loaded with an extra large work surface and two work/brush stations. A light kit and parts basket are also standard equipment with this model.

Part#	Case/Order#	Unit Size	Units/cs
14710	1005003	47"H x 42"W x 38"D	1

## SW-37 MOBILE HEAVYWEIGHT PARTS WASHER

SW-37 – features a 1000 lbs. load capacity. It's tough enough for the big jobs and can easily be moved through the shop area on its mobile dolly or can stay in place with locking casters. It has a large, oversized sink to accommodate multi-sized parts.

Part#	Case/Order#	Unit Size	Units/cs
14162	1004859	49"H x 48"W x 35"D	1

## SMARTWASHER® BENCHTOPPRO® Bioremediating Parts Washer

The BenchtopPRO® is a bench-top parts washer for the small shop or home garage when a standard SmartWasher® unit is too large. Featuring bioremediation technology and a solvent-free professional grade cleaning solution, the BenchtopPRO® cleans greasy, dirty, oily parts without the need for waste disposal. Non-hazardous and non-flammable, this revolutionary parts washer offers a safer alternative to hazardous solvents without compromising cleaning performance. CLEAN. CLOSE. STORE.™

Part#	Case/Order#	Unit Size	Units/cs
N/A	1000872	12.63"H x 28.38"W x 17.25"D	1

## SINK COVERS

Heavy-duty woven fabric withstands industrial and shop environments to keep dust and dirt out of the SmartWasher® sink.

Part#	Case/Order#	Description	Units/cs
14889	1005152	Cover for SmartWasher® SW-23 Mobile Parts Washer Fits 14161	1
14890	1005153	Cover for SmartWasher® SW-25 Signature Parts Washer Fits 14145	1
14891	1005154	Cover for SmartWasher® SW-28 SuperSink Parts Washer Fits 14144	1
14892	1005155	Cover for SmartWasher® SW28-XE SuperSink Parts Washer Fits 14710	1
14893	1005156	Cover for SmartWasher® SW-37 Mobile Heavyweight Parts Washer Fits 14162	1

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## OZZYJUICE® DEGREASING/ CLEANING SOLUTION **A1**

OzzyJuice® is a powerful, aqueous-based degreasing/cleaning solution that is pH-neutral, non-irritating, non-flammable and non-hazardous. Armed with superior cleaning capability, OzzyJuice® solutions will match or surpass the performance of premium solvents without the associated risks. All OzzyJuice® solutions are NSF A1 Registered.

Part#	Case/Order#	Description	Size	Units/cs
14720	1005005	SW-3 Truck Grade Degreasing Solution	5 gal pail	1
14726	1005011	SW-3 Truck Grade Degreasing Solution	55 gal drum	1
14148	1004853	SW-4 Heavy Duty Degreasing Solution	5 gal pail	1
14728	1005013	SW-4 Heavy Duty Degreasing Solution	55 gal drum	1
14721	1005006	SW-7 Parts/Brake Cleaning Solution	5 gal pail	1
14723	1005008	SW-7 Parts/Brake Cleaning Solution	55 gal drum	1
14722	1005007	SW-8 Aircraft, Weapons & Select Metals Degreasing Solution	5 gal pail	1
14724	1005009	SW-8 Aircraft, Weapons & Select Metals Degreasing Solution	55 gal drum	1
N/A	1751304	SW-X1 High Performance Degreasing Solution	5 gal pail	1
N/A	1751309	SW-X1 High Performance Degreasing Solution	55 gal drum	1



## FL-4 OZZYMAT® MULTI-LAYER FLUID ACTIVATION MAT

Designed for applications with normal to heavy usage, the FL-4 Multi-Layer OzzyMat® has (4) white layers and (1) blue layer. The white layers on the mat trap any particulate larger than 50 microns and should be peeled away once per week for optimum performance. The blue layer is the support structure that contains the microbes (Ozzy®) and delivers them into the system. These microbes (Ozzy®) migrate from the OzzyMat® into the OzzyJuice®, located in the SmartWasher® tank, and break down oil and grease.



Part#	Item#	Case/Order#	Description	Units/cs
14124	1004844	1004843	FL-4 OzzyMat® Multi-Layer Fluid Activation Mat	6

## OZZYBOOSTER® Microbial Enhancer

OzzyBooster® is a microbial enhancer that can be used to enhance or “boost” microbial activity in the SmartWasher® system. It increases the density of Ozzy® (microbes) within the OzzyJuice®. When a machine is overused, there may be a need for extra microbes to help ease the load.

Part#	Item#	Case/Order#	Size	Units/cs
14131	1007982	1004849	8.5 oz Bottle	6



## ODOR NEUTRALIZER

Odor Neutralizer treats entire unit to reduce or eliminate any odors which may occur from standard parts washing.

Part#	Item#	Case/Order#	Size	Units/cs
14132	1004850	1752727	4 oz Bottle	4



## DEFOAMER

The only Defoamer proven safe for use in the CRC SmartWasher® without harming Ozzy® Microbes.

Part#	Item#	Case/Order#	Size	Units/cs
14849	1005117	1752725	4 oz Bottle	4



## SMARTWASHER® START-UP KITS

Each SmartWasher® can be ordered as a complete start-up kit. Each kit contains the solution and the filter necessary to get you up and running quickly. Select the SmartWasher® model and solution type based on your cleaning needs. Please visit our website, [crcindustries.com](http://crcindustries.com), and search “kit” for options.



*Spare wrench available, Legacy# 14885/ Case/Order# 1005147. Wrench is used to easily open OzzyJuice® containers.*

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## PENETRATING

### KNOCK'ER LOOSE® H2

#### Penetrating Solvent

An industrial-strength lubricant and penetrant designed to quickly loosen and free seized, bound or frozen fasteners. It quickly dissolves rust, scale, gum, grease and corrosion with a formula that creeps into cracks, seams, threads and joints better than any other penetrant brands. Eases the disassembly of machinery, tools and equipment for routine maintenance and emergency repairs.

Part#	Item#	Case/Order#	Size	Units/cs
03020	1003270	1003269	16 oz aerosol	12
03024	1003276	1003275	16 oz non-aerosol w/trigger	12



### KNOCK'ER LOOSE® PLUS H2

#### Penetrating Solvent

A unique penetrant that immediately drops the temperature of the area in contact with the spray. The freeze-shock action cracks rusted surfaces, allowing Knock'er Loose® Plus to reach deeper and work more effectively than other penetrants.

Part#	Item#	Case/Order#	Size	Units/cs
03027*	1003280	1003279	20 oz aerosol	12



### SCREWLOOSE® SUPER PENETRANT H2

Quickly penetrates through rust and corrosion to rapidly free corroded bolts, screws, fasteners, pins and bound mechanisms. Eases disassembly of mechanical equipment, fittings and fixtures.

Part#	Item#	Case/Order#	Size	Units/cs
03060	1003322	1003321	16 oz aerosol	12



## MULTI-PURPOSE

### 3-36® H2

#### Multi-Purpose Lubricant and Corrosion Inhibitor

Multi-purpose lubricant, penetrant and corrosion inhibitor forms a clear, thin film that lubricates, prevents corrosion, displaces moisture and penetrates. Drives out moisture and leaves a thin, long-lasting film to protect against corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
03005	1003255	1003254	16 oz aerosol	12
03007	1003259	1003258	16 oz non-aerosol bottle	12
03006	1003257	1003256	1 gal bottle	4
03009	1003261	1003261	5 gal pail	1
03011	1003262	1003262	55 gal drum	1



### ULTRA-LITE 3-36® H2

An ultra-thin, non-staining dry film lubricant that resists oil, dust and dirt build-up. Penetrates into the most minute openings, sealing out moisture and preventing corrosion with an ultra-light protective film.

Part#	Item#	Case/Order#	Size	Units/cs
03160	1003427	1003426	16 oz aerosol	12



### DRY PTFE LUBE H2

A multi-purpose, micro-thin film containing PTFE. Dry PTFE Lube penetrates and bonds to most surfaces including metal, wood, rubber, plastic and glass. It forms a micro-thin film that prevents sticking, reducing friction and wear.

Part#	Item#	Case/Order#	Size	Units/cs
03044	1003302	1003301	16 oz aerosol	12



### POWER LUBE® H2

#### High-Performance Lubricant w/PTFE

High-performance, multi-purpose lubricant with the benefits of PTFE to provide long-lasting lubrication and protection against friction, wear and corrosion. Will increase the life and operating efficiency of parts and equipment, as well as withstand extreme load-carrying situations. Up to 4500 lbs in Falex test.

Part#	Item#	Case/Order#	Size	Units/cs
03045*	1003304	1003303	16 oz aerosol	12




🌀 – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

PRODUCT	Base Type	Film Type	Color	360° Spray	Falex (In Pounds)	Flash Point (F)	NSF Category Code	SDS Label Attached	Container Size
Knock'er Loose®	Petroleum	Non-Drying	Reddish	Yes	N/A	147°F	H2	Yes	16 16
Knock'er Loose® Plus	Petroleum	Non-Drying	Orange	Yes	N/A	147°F	H2	Yes	20
Screwloose® Super Penetrant	Petroleum	Non-Drying	Light Amber	Yes	N/A	141°F	H2	Yes	16
3-36®	Petroleum	Non-Drying	Blue-Green	Yes	1000	192°F	H2	Yes	16 16 1 5 55
Ultra-Lite 3-36®	Petroleum	Dry, Ultra-Thin	Amber	Yes	1000	194°F	H2	Yes	16
Dry PTFE Lube	Alcohol/PTFE	Dry, Micro-Thin	White	No	N/A	<20°F	H2	Yes	16
Power Lube®	Petroleum/PTFE	Non-Drying	Light Amber	No	up to 4500	<20°F	H2	Yes	16

LUBRICANTS

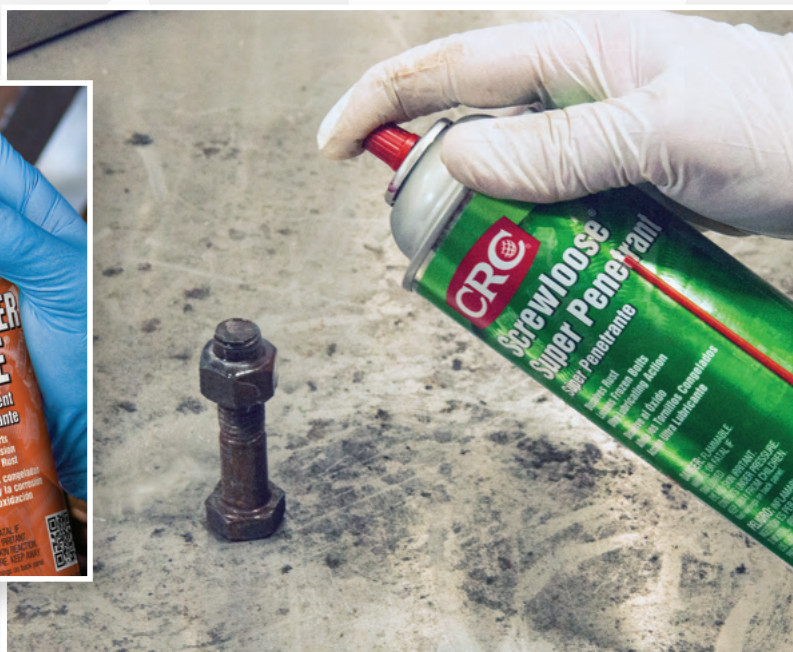

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## CHAIN & WIRE ROPE LUBRICANT H2

Specifically formulated blend of synthetic lubricants and an organic molybdenum, anti-wear additive that penetrates deep, and leaves a tough film that lubricates and protects. Chain & Wire Rope Lube extends the working life of chains and wire rope and reduces wear caused by friction and corrosion.

Part#	Item#	Case/Order#	Size	Units/cs
03050*	1003306	1003305	16 oz aerosol	12



## TAC 2® ADHESIVE CHAIN LUBRICANT H2

Low-viscosity formula provides the ability to penetrate and thoroughly coat vital chain pin and bushing areas. Contains molybdenum which provides cling ability to avoid sling-off or excess dripping. High temperature stability (up to 350°F continuous). Blue color allows instant identification of lubricated parts and equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03076**	1003335	1003334	16 oz aerosol	12



## HEAVY DUTY CLEAR PENETRATING GREASE H2

High-tack, clear lubricating gel provides superior lubrication and withstands high temperatures and pressures. Penetrates deep to form a tenacious, long-lasting film and resists acids, alkalis, salt, oxidation, weather and steam. This heavy-duty clear penetrating gel can extend the operating service life of equipment and reduce wear, galling and scarring.

Part#	Item#	Case/Order#	Size	Units/cs
03056**	1003316	1003315	20 oz aerosol	12



## EXTREME DUTY SILICONE H2

Premium-grade silicone fluid that exhibits superior lubrication and temperature viscosity characteristics. Use Extreme Duty Silicone on all metallic and non-metallic surfaces. Clear, non-staining, odorless and reduces friction and galling.

Part#	Item#	Case/Order#	Size	Units/cs
03030* <sup>1</sup>	1003285	1003284	16 oz aerosol	12



## WHITE LITHIUM GREASE H2

High-purity, high-quality, NLGI Grade 2 white lithium-based aerosol grease provides superior lubrication and durability in any weather or temperature. Excellent as a break-in lubricant for bearings, and for general purpose lubrication and corrosion protection of machinery, tools and equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03080*	1003341	1003340	16 oz aerosol	12



## CHUTE LUBE® H2 Silicone Lubricant

Chute Lube® Silicone Lubricant helps boxes glide down chutes and rails on package handling and sorting conveyors. Silicone spray for package handling applications minimizes corrosion and provides excellent lubricity. Its colorless, odorless, non-staining film lubricates and protects in most metal to non-metal applications. Eliminates the binding and sticking of packages and boxes, while protecting most surfaces even in wet conditions.

Part#	Item#	Case/Order#	Size	Units/cs
03204*	1003459	1003458	20 oz aerosol	12
03220	1003464	1003463	16 oz non-aerosol bottle	12
03222	1003466	1003466	5 gal pail	1
03223	1003467	1003467	55 gal drum	1



<sup>1</sup> - 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

1 - Item restricted from sale in some states. See product page on CRC website for specific restrictions.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

PRODUCT	Base Type	Film Type	Appearance	360 Valve	Flash Point (F)	NSF Category Code	SDS Label Attached	Container Size
Extreme Duty Silicone	Silicone	Dry	Clear Colorless Liquid	Yes	1.4°F	H2	Yes	16
Chute Lube® Silicone Lubricant	Silicone	Wet	Clear Light Yellow Liquid	No N/A	<0°F (aerosol) 113°F (bulk)	H2	Yes No	16 20 5 55
Chain and Wire Rope Lubricant	Molybdenum Disulfide	Non-Drying	Clear Light Amber Liquid	No	<0°F	H2	Yes	16
Heavy Duty Clear Penetrating Grease	Aluminum Complex	Clear Oily	Clear Liquid	No	<20°F	H2	Yes	20
White Lithium Grease	Lithium-12	Grease	Off-White Viscous Grease	No	0°F	H2	Yes	16
TAC 2® Adhesive Chain Lubricant	Petroleum Oil	Soft Film	Blue Liquid	Yes	<0°F	H2	Yes	16

LUBRICANTS



Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## SP-350™ H2

### Corrosion Inhibitor

Provides protection for metal parts and assemblies that are stored indoors or in shipment. SP-350™ Corrosion Inhibitor promotes easy start-up of stored equipment.

Part#	Item#	Case/Order#	Size	Units/cs
03262	1003477	1003476	16 oz aerosol	12
03266	1003478	1003478	5 gal pail	1







## SP-400™ H2

### Corrosion Inhibitor

Long-term indoor/outdoor corrosion inhibitor for machined surfaces and assemblies subjected to long periods of storage or adverse shipping conditions. Provides protection of all equipment subject to heat, humidity, chemicals or severely corrosive atmospheres.

Part#	Item#	Case/Order#	Size	Units/cs
03282*	1003481	1003480	16 oz aerosol	12
03286	1003485	1003485	5 gal pail	1



PRODUCT	Appearance	Corrosion Protection	Drying Time (to touch)	Specifications	NSF Category Code	SDS Label Attached	Container Size
SP-350™	Thin, Non-Drying	Indoors – Up to 2 Years	Non-Drying	NSF H2 Registered	H2	Yes	 
SP-400™	Waxy	Indoors & Outdoors – Up to 2 Years	1 Hour	NSF H2 Registered, Meets requirements of MIL-C-16173 Grade 4 (corrosion test only)	H2	Yes	 

🌀 – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## CUTTING OIL P1

Superior thread cutting lubricant for use on all types of ferrous and non-ferrous metals, including brass, copper and aluminum.

Part#	Item#	Case/Order#	Size	Units/cs
14050 <sup>2</sup>	1004784	1004783	16 oz aerosol	12
14051 <sup>2</sup>	1004786	1004785	1 gal bottle	4



PRODUCT	Type	Color	Metal Compatibility	NSF Category Code	Container Size
Cutting Oil	Petroleum Oils	Dark Amber	All Metals	P1	

## ELECTRICAL PRECISION CLEANERS

### CONTACT CLEANER 2000<sup>®</sup> K2

Precision Cleaner

Provides fast-cleaning action for the removal of dirt, light oils and other contaminants. It evaporates quickly, leaves no residue, has no flash point. Not recommended for use on Noryl<sup>®</sup> or polycarbonate type plastics.

Part#	Item#	Case/Order#	Size	Units/cs
02140 <sup>1</sup>	1003224	1003223	16 oz aerosol	12



### ELECTRONIC COMPONENT CLEANER K2

Precision Cleaner

Aggressive precision cleaner for use on electronic components in industrial, electrical and aviation applications. Its high-purity, fast-penetrating formula aggressively dissolves and rinses away dust, lint, dirt, oils, polar soils and other contaminants from most non-plastic surfaces. It evaporates rapidly, leaves no residue and has no flash point.

Part#	Item#	Case/Order#	Size	Units/cs
02200 <sup>1</sup>	1003243	1003242	16 oz aerosol	12



### CONTACT CLEANER 2000<sup>®</sup> VC K2

Precision Cleaner

Aggressive precision cleaner designed to remove contaminants from electronic equipment. It provides an effective alternative to HCFC 141b-based cleaners when sensitive plastics are not a concern. It is VOC compliant in all 50 states<sup>∞</sup>.

Part#	Item#	Case/Order#	Size	Units/cs
02240 <sup>1</sup>	1003249	1003248	16 oz aerosol	12



### PF PRECISION CLEANER K2

Innovative contact cleaner that offers strong cleaning action, fast evaporation and no residue in electronic cleaning applications. PF Precision Cleaner has no flash point and is safe to use on plastics.

Part#	Item#	Case/Order#	Size	Units/cs
02190 <sup>1</sup>	1003241	1003240	16 oz aerosol	12



<sup>1</sup> – 360° spray valve can be sprayed in the UP or DOWN position.

1 – Item restricted from sale in some states. See product page on CRC website for specific restrictions.

2 – Item restricted from sale in SCAQMD

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

LUBRICANTS

METALWORKING

ELECTRICAL MAINTENANCE

# ELECTRICAL PRECISION CLEANERS

## CO® CONTACT CLEANER **K2**

Provides an optimal alternative to CFC, HCFC and flammable contact cleaners. Is VOC exempt. Regular use of CO® Contact Cleaner will help prevent electrical failures, increase performance and prolong equipment life by dissolving and rinsing away contaminants.



Part#	Item#	Case/Order#	Size	Units/cs
02016	1003172	1003171	16 oz aerosol	12
02017 <sup>1</sup>	1003174	1003173	16 oz non-aerosol can w/trigger	12

## QD® CONTACT CLEANER **K2**

A petroleum distillate and alcohol-blended precision cleaner suitable for sensitive electronics. Evaporates quickly, leaves no residue and is safe to use on all plastics. Ideal for applications where lower flash point solvents can be used.



Part#	Item#	Case/Order#	Size	Units/cs
02130*	1003218	1003216	16 oz aerosol	12
02133**	1008124	1003221	16 oz non-aerosol can w/trigger	12

PRODUCT	Base Type	Flash Point (F)	Evaporation Rate	Dielectric Strength	Plastic Safe	SDS Label Attached	NSF Category Code	VOC % <sup>∞</sup>	Container Size
Contact Cleaner 2000® Precision Cleaner	HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	
Contact Cleaner 2000® VC	HFE	None	Fast	30,800 Volts	May be harmful to some plastics	Yes	K2	35.8	
CO® Contact Cleaner	HFE	None	Very Fast	27,600 Volts (Aerosol) 28,750 Volts (Bulk)	Yes	Yes	K2	0	
PF Precision Cleaner	HFE	None	Very Fast	26,360 Volts	Yes	Yes	K2	6.0	
QD® Contact Cleaner	Hydrocarbon Solvents	16°F (aerosol) <0°F (bulk)	Very Fast	39,500 Volts (aerosol) 30,500 Volts (bulk)	Yes	Yes	K2	74.9	
Electronic Component Cleaner	HFE	None	Fast	26,100 Volts	May be harmful to some plastics	Yes	K2	66.5	

# ELECTRICAL HEAVY DUTY DEGREASERS

## LECTRA CLEAN® **K2**

### Heavy Duty Electrical Parts Degreaser for Energized Equipment

Quickly and effectively removes grease, oil, tar, dirt, grime, corrosion, sludge and other stubborn substances from energized electrical equipment to increase operating efficiency. Offers quick and efficient degreasing action, fast evaporation and no residue. With no flash point, it is an excellent alternative to 1,1,1-based cleaning products. Use with caution near plastics. Designed specifically to be safe for use on energized electrical equipment.



Part#	Item#	Case/Order#	Size	Units/cs
02018	1003177	1003175	20 oz aerosol	12

## LECTRA CLEAN® II **K1 K2**

An excellent alternative for cleaning electric motors and equipment where chlorinated solvents are not acceptable. Lectra Clean® II effectively removes soils and cleans surfaces without residue build-up. Use with caution on plastics. Non-conductive, non-corrosive, low odor.



Part#	Item#	Case/Order#	Size	Units/cs
02120	1003209	1003208	20 oz aerosol	12

- 360° spray valve can be sprayed in the UP or DOWN position.

<sup>∞</sup> - As defined by Consumer Products VOC regulations.

<sup>1</sup> - Item restricted from sale in some states. See product page on CRC website for specific restrictions.

\*\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## ELECTRICAL PARTS CLEANER K2 for Energized Equipment

Effective heavy-duty degreaser provides strong degreasing action, fast evaporation and no residue when cleaning energized electrical parts and equipment. It is non-flammable and VOC-exempt. Use with caution near plastics and paints. Designed specifically to be safe for use on energized electrical equipment.

Part#	Item#	Case/Order#	Size	Units/cs
02180	1003236	1003235	20 oz aerosol	12



## LECTRA FORCE™ K2 Electrical Cleaner

Revolutionary technology combines the power of a high-performance, industrial-strength degreaser with lower VOCs. It quickly dissolves grease, oil and sludge for more efficient operation of electrical equipment. Lectra Force™ Electrical Cleaner evaporates rapidly, leaves no residue and has a good health and safety profile.

Part#	Item#	Case/Order#	Size	Units/cs
02115 <sup>1</sup>	1003207	1003206	20 oz aerosol	12



### ELECTRICAL HEAVY DUTY DEGREASERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	VOC % <sup>∞</sup>	NSF Category Code	SDS Label Attached	Container Size
Lectra Clean®	Chlorinated	90	None	Very Fast	18,340 Volts	0	K2	Yes	
Lectra Clean® II	Petroleum Distillate	75	185°F	Slow	42,100 Volts	0	K1, K2	Yes	
Electrical Parts Cleaner	Chlorinated	95	None	Very Fast	37,500 Volts	0	K2	Yes	
Lectra Force™ Electrical Cleaner	DCE/HFE	97	None	Fast	39,000 Volts	42.4	K2	Yes	

### ELECTRICAL CABLE CLEANERS

## CABLE CLEAN® DEGREASER K2 High Voltage Splice Cleaner

Advanced technology that combines the power of a high-performance, high-voltage splice and termination cleaner with an industrial-strength degreaser. Helps prevent current leakage, excessive resistance, reduced performance and arcing at splice and termination junctions by quickly removing grease, oil, wax, dirt, silicone lubricants and other contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
02064	1003191	1003190	20 oz aerosol	12



## CABLE CLEAN® RD™ (Rapid Dry) K2 High Voltage Splice Cleaner

Chlorinated solvent-based cleaner for the removal of contaminants from the semi-conductive core of high-voltage cables. Offers effective cleaning action with the benefits of non-flammability, no residue and fast evaporation. It can be used to replace 1,1,1-Trichloroethane without sacrificing performance. It contains no known ozone-depleting chemicals.

Part#	Item#	Case/Order#	Size	Units/cs
02150 <sup>1</sup>	1003230	1003229	16 oz aerosol	12



### ELECTRICAL CABLE CLEANERS

PRODUCT	Base Type	Cleaning Strength (KB)	Flash Point (F)	Evaporation Rate	Dielectric Strength (Volts)	NSF Category Code	SDS Label Attached	Container Size
Cable Clean® Degreaser	DCE/HFE	125	None	Fast	26,800	K2	Yes	
Cable Clean® RD™	Chlorinated	96	None	Fast	41,100	K2	Yes	

<sup>1</sup> - Item restricted from sale in some states. See product page on CRC website for specific restrictions.  
KB = Kauri Butanol

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

ELECTRICAL MAINTENANCE

## 2-26® H2

### Multi-Purpose Precision Lubricant

Prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Drives out moisture and leaves a thin, long-lasting film. Use around modern plastics and insulators.

Part#	Item#	Case/Order#	Size	Units/cs
02004	1003161	1003160	6 oz aerosol	12
02005	1003163	1003162	16 oz aerosol	12
02007	1003167	1003166	16 oz non-aerosol bottle	12



## DIELECTRIC GREASE H1

Unique, non-curing silicone compound used for electrical sealing, lubricating, protecting and insulating. Dielectric Grease waterproofs electrical connections and components to protect against arcing due to moisture and other contaminants.

Part#	Item#	Case/Order#	Size	Units/cs
02085	1003199	1003198	6 oz pressurized can w/ Select-A-BEAD® Nozzle	12



## ELECTRICAL SILICONE LUBRICANT H1

Lubricates, waterproofs and protects with a thin, clear, non-staining dry film. Eliminates binding and sticking; protects most surfaces. Low surface tension permits better coverage and deeper penetration.

Part#	Item#	Case/Order#	Size	Units/cs
02094*	1003201	1003200	16 oz aerosol	12
02097*	1003203	1003203	55 gal drum	1



## ELECTRICAL LUBRICANTS

PRODUCT	Base Type	Film Type	Color	Flash Point (F)	Dielectric Strength (Volts)	NSF Category Code	SDS Label Attached	Container Size
2-26®	Petroleum Distillate	Non-Drying	Amber	200°F	51,300 Volts	H2	Yes	
Electrical Silicone Lubricant	Silicone	Dry	Clear	<0°F	350 Volts/Mil	H1	Yes	
Dielectric Grease	Silicone	Non-Curing	White	>572°F	>450 Volts/Mil	H1	No	

☝ – 360° spray valve can be sprayed in the UP or DOWN position.

\*This product is labeled extremely flammable. Read and observe the special usage warning on the label. Do not apply while equipment is energized.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## RTV SILICONE ADHESIVE/SEALANTS

CRC Room Temperature Vulcanizing (RTV) Adhesive/Sealants are designed for a wide range of sealing, bonding, protecting and waterproofing. They cure at room temperature – no special curing methods required. The chemically stable formulations show little change in physical properties after exposure to rain, snow, temperature extremes and weathering.

- Clear: Forms a barely visible water-tight seal
- White: Designed for high moisture, indoor/outdoor applications
- Blue: Heavy-duty industrial gasket sealant
- Red: High-temperature, low-odor, non-corrosive gasket sealant
- Black: High-pressure, low-odor, non-corrosive gasket sealant

## RTV SILICONE PRESSURIZED TUBES

Revolutionary packaging with Select-a-BEAD® Nozzle – allows user to control bead width. Dispenses a uniform bead for consistent results. Pressurized package keeps silicone fresh so it won't dry out. Self-sealing plug – Simply pull out to re-use the product. VOC compliant.



Part#	Item#	Case/Order#	Size	Units/cs
14055+	1004788	1004787	Clear 8 oz tube	12
14056+	1004790	1004789	White 8 oz tube	12
14057	1004792	1004791	Blue 8 oz tube	12
14059	1004794	1004793	Red 8 oz tube	12
14072	1004800	1004799	Black 8 oz tube	12



## RTV SILICONE CARTRIDGES

Economical for large jobs. Convenient screw-on nozzle. Fast dispensing for applications that require less precision. VOC compliant.

Part#	Item#	Case/Order#	Size	Units/cs
14073+	1004802	1004801	Clear 12 oz cartridge	12



## FOOD ZONE SILICONE SEALANTS

NSF-Certified under Standard 51 for sealing, bonding, protecting and waterproofing food equipment. RTV Silicone properties remain intact after exposure to moisture and temperature extremes.

Part#	Item#	Case/Order#	Size	Units/cs
14083+	1004814	1004813	Clear 12 oz cartridge	12



## AEROSOL LEAK DETECTOR P1

Formulated for the quick and easy site detection of gas leaks and air leaks. Reliably locates gas leaks and pressure losses in pipes and pressurized systems by forming highly visible bubbles when applied over any leak. The water-based formula contains no oils, silicones or harmful solvents. Highlights all leaks, even under low pressure. Non-flammable aerosol package enables fast and easy application with no waste or spillage. No odor. NSF P1 Registered.

Part#	Item#	Case/Order#	Size	Units/cs
14503	1004997	1004996	20 oz aerosol	12









+ – Meets NSF/ANSI Standard 51  
 ∞ – As defined by Consumer Products VOC regulations.

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

SPECIALTY PRODUCTS

ELECTRICAL MAINTENANCE

# SPECIALTY PRODUCTS

PRODUCT	Room Temp. Curing	Corrosive to Metals	Temperature Range	Elongation %	Dielectric Strength	Tensile Strength (Lab Shear)	Conforms to Specifications	Container Size
Food Zone Silicone Sealant Clear	Yes	Yes	-50°F- 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, FDA Reg. 21 CFR-177.2600	
RTV Silicone Adhesive/Sealant Clear	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	
RTV Silicone Adhesive/Sealant White	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, NSF/ANSI Standard 51, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	
RTV Silicone Adhesive/Sealant Blue	Yes	Yes	-50°F to 400°F	500%	25 KV/mm	264 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920, FDA Reg. 21 CFR-177.2600	
RTV Silicone Adhesive/Sealant Red	Yes	No	-50°F to 500°F	560%	18 KV/mm	260 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920	
RTV Silicone Adhesive/Sealant Black	Yes	No	-50°F to 400°F	560%	18 KV/mm	260 psi	Mil-A-46106 Type 1, TT-S-00230-C, ASTM-C-920	

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.




## FOOD GRADE SILICONE MOLD RELEASE **M1**

Formulated to be used for light-duty applications. Contains the same high-quality ingredients as our General Purpose Silicone Mold Release. Light-duty silicone content 3%. NSF M1 Registered.



Part#	Item#	Case/Order#	Size	Units/cs
03301	1003490	1003489	16 oz aerosol	12

PRODUCT	Type	Film Type	Paint Compatible	Temperature Range	SDS Label Attached	NSF Category Code	Container Size
Food Grade Silicone Mold Release	Silicone	Non-Drying	No	Up to 600°F	Yes	M1	16

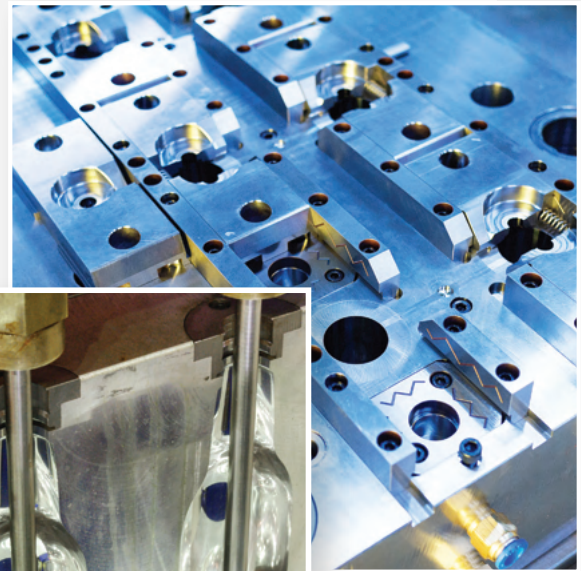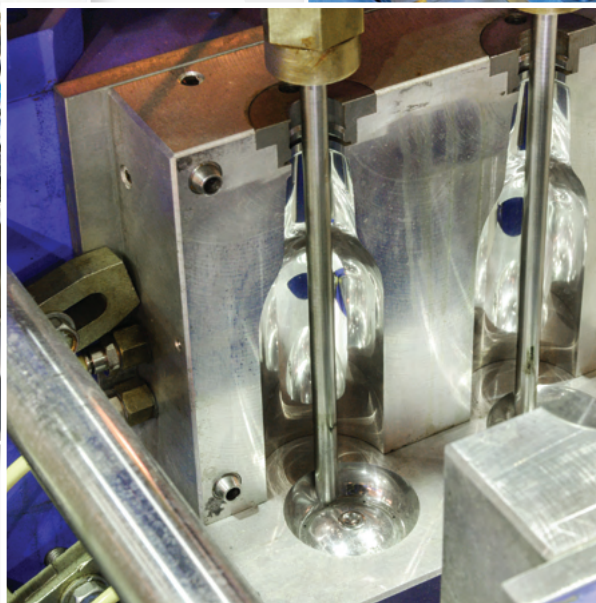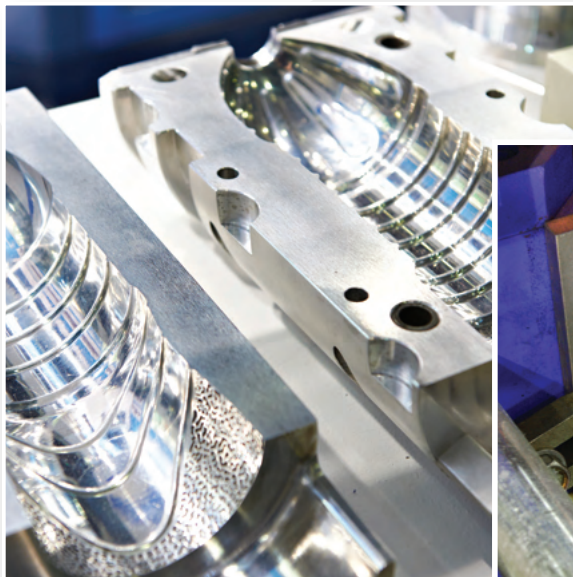

SPECIALTY PRODUCTS

MOLD RELEASES

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.

## BIODEGRADABLE

A substance that is capable of being broken down into harmless products by the action of living things. The rate at which compounds may be chemically broken down by bacteria and/or natural environmental factors.

## CONSUMER PRODUCTS VOC REGULATIONS

Several states have restrictions on the amount of Volatile Organic Compounds (VOC) that can be present in consumer and institutional use products. VOC limits are set by product category. There are a wide range of regulated categories including cleaners, degreasers, lubricants, adhesives, sealants and automotive cleaners.

## DIELECTRIC STRENGTH

The minimum electrical gradient that a material can withstand without decomposition usually specified in volts per millimeter of thickness. Also known as the breakdown voltage.

## ELONGATION PERCENT

Directly related to Tensile Strength. Elongation is the deformation that results from the application of a tensile force and is calculated as the change in length divided by the original length.

## EMULSION

A mixture of water-soluble and water-insoluble groups held together by a surfactant. Emulsions are usually milky white.

## EXTREMELY FLAMMABLE

As defined by the Consumer Products Safety Commission, a substance with a flashpoint at or below 20°F as determined by Tagliabue Closed Cup Tester. Or, for an aerosol, if the flame travels back to the actuator and the flashpoint is at or below 20°F.

## FALEX TEST

A method for determining the extreme pressure (EP) or anti-wear properties of oils and greases. Vee blocks (with large "V-shaped notch) are placed on opposite sides of rotating steel shaft, and the apparatus is immersed in the test lubricant. Load is automatically increased until seizure occurs. Measurable wear scars are formed on the blocks.

## FERROUS

Metals related to or containing iron.

## FLAMMABLE

Capable of catching fire easily and burning rapidly. OSHA defines flammable liquids as having a flashpoint below 100°F.

## FLASH POINT

The lowest temperature of a liquid or solid at which it gives off vapors that will ignite but not continue to burn when a small flame is periodically passed over the surface.

## GALLING

Destructive wear of a metal surface characterized by large chunks of metal being removed.

## KB VALUE

The Kauri Butanol (KB) value is a measure of the solvent power of a hydrocarbon liquid. Kauri gum is readily soluble in butanol but insoluble in hydrocarbons. The KB value is the measure of the volume of solvent required to produce turbidity in a standard solution containing kauri gum dissolved in butanol. The higher the KB value, the more powerful the solvent.

## NLGI GRADE

National Lubricating Grease Institute. A numerical scale for classifying the consistency of a particular grease. The most common consistency number is #2. Softer grades, especially #0 and #1, are often used for improved pumpability or low-temperature service. High consistency numbers, #3 through #6 are used for certain high-speed bearings where leakage and sealing are particular concerns.

## NSF RATING

National Sanitation Foundation Registration Program for Proprietary Substances and Nonfood Compounds. This program mirrors the prior USDA program. Product evaluation is based on formulation and label review. Approved products receive a Letter of Authorization and are included on the NSF White Book List of Proprietary Substances and Nonfood Compounds.

## NON-FERROUS

Metals that contain no iron.

## ODCs

Ozone Depleting Compounds. Substances that contribute to the deterioration of the ozone. There are two types of ODCs: Class I and Class II ozone depleters. Class I ODCs are the most harmful to the ozone. Currently listed as Class I ODCs are chlorofluorocarbons (CFCs), carbon tetrachloride, and 1,1,1-Trichloroethane. Class II ODCs are less harmful but still pose a threat. Currently listed as Class II ODCs are HCFCs.

## PH

A scale ranging from 0 to 14 used to measure acidity and alkalinity. The lower the number the more acidic; the higher the number, the more alkaline; 7 is neutral.

## PSI

Pound per Square Inch. A unit of pressure equal to the pressure resulting from a force of 1 pound applied uniformly over an area of 1 square inch.

## SAE

Society of Automotive Engineers.

## SUBSTRATE

The surface being cleaned; the substrate may be metal, plastic, ceramic, etc.

## SURFACTANT

A specialized molecule that connects water soluble and water-insoluble groups.

## TENSILE STRENGTH

The strength of different metals to support different loads (masses) before going through the point at which they change from being elastic to being plastic. The tensile strength test measures the elastic and plastic properties of metal.

## TIMKEN OK LOAD

The highest load than can be applied without abrasive wear to a rotating test cup containing a grease sample. The higher the OK number, the better protection a grease provides under severe service. The highest number typically given to any sample is 80.

## VISCOSITY

The resistance to flow or degree of thickening fluid. Flow requires stress; liquids such as additive-free lubricating oils are known as Newtonian fluids in that shear rate is proportional to the pressure or stress applied. This proportion is the coefficient of viscosity.

## VOCS

Volatile Organic Compounds. A class of chemicals that contain carbon and have the potential to form ground-level ozone (smog). Many common items including gasoline, oil-based paints and alcohols produce VOCs.



<b>A</b>			<b>P</b>			
Aerosol Leak Detector	30	Food Grade Silicone	5	PF Precision Cleaner	9	
<b>C</b>			Food Zone Silicone Sealants	30	PF Precision Cleaner	26
Cable Clean® Degreaser High Voltage Splice Cleaner	28	Food Grade Silicone Mold Release	32	Power Lube® High-Performance Lubricant W/PTFE	21	
Cable Clean® Rd™ (Rapid Dry) High Voltage Splice Cleaner	28	Food Grade Synthetic Grease	8	<b>Q</b>		
CE™ Precision Cleaner	9	Food Grade Syntha-Tech™ Lubricant with PTFE	5	QD® Contact Cleaner	9	
Chlor-Free® Degreaser	13	Food Grade Water Based Silicone	5	QD® Contact Cleaner	27	
Chlor-Free® Universal Degreaser	13	Food Grade White Grease	5	Quick Clean™ Safety Solvent And Degreaser	13	
Chain & Wire Rope Lubricant	23	<b>G</b>			<b>R</b>	
Chute Lube® Silicone Lubricant	23	Gasket Remover Paint And Decal Remover	14	RTV Silicone Adhesive/Sealants	30	
Citrus Degreaser	13	<b>H</b>			RTV Silicone Cartridges	30
CO® Contact Cleaner	27	Heavy Duty Clear Penetrating Grease	23	RTV Silicone Pressurized Tubes	30	
Contact Cleaner	9	Heavy Duty Degreaser	12	<b>S</b>		
Contact Cleaner 2000® Precision Cleaner	9	Heavy Duty Degreaser II	13	Super Degreaser™ MUO	12	
Contact Cleaner 2000® Precision Cleaner	26	HF™ Contact Cleaner	10	Super Degreaser™ Plus	12	
Contact Cleaner 2000® VC Precision Cleaner	26	HydroForce® All Purpose Degreaser	16	Screwloose® Super Penetrant	21	
Contact Cleaner & Protectant	10	HydroForce® Butyl-Free All Purpose Cleaner	16	SmartWasher® BenchTopPRO®	19	
Cutting Oil	26	HydroForce® Glass Cleaner Professional Strength	16	Sink Covers	19	
<b>D</b>			HydroForce® Super Citrus™ Heavy Duty Degreaser	16	SmartWasher® Start-Up Kits	20
Defoamer	20	HydroForce® Germicidal Foam Cleaner	16	SP-350™ Corrosion Inhibitor	25	
Dielectric Grease	29	HydroForce® Industrial Strength Degreaser	16	SP-400™ Corrosion Inhibitor	25	
Dry PTFE Lube	21	HydroForce® Stainless Steel Cleaner & Polish	16	SW-23 Mobile Parts/Brake Washer	19	
Duster™	10	HydroForce® Zero VOC General Purpose Cleaner	16	SW-25 Signature Parts Washer	19	
<b>E</b>			<b>I</b>			
Electrical Parts Cleaner for Energized Equipment	28	Industrial Adhesive Remover	14	SW-28 Supersink Parts Washer	19	
Electrical Silicone Lubricant	29	Isopropyl Alcohol Precision Cleaner	10	SW-28XE Supersink XE Parts Washer	19	
Electronic Component Cleaner Precision Cleaner	9	<b>K</b>			SW-37 Mobile Heavyweight Parts Washer	19
Electronic Component Cleaner Precision Cleaner	26	Knock'er Loose® Penetrating Solvent	21	<b>T</b>		
Extreme Duty Silicone	23	Knock'er Loose® Plus Penetrating Solvent	21	TAC 2® Adhesive Chain Lubricant	23	
<b>F</b>			<b>L</b>			
FL-4 Ozzymat® Multi-Layer Fluid Activation Mat	20	Lectra Clean® II	27	T-Force® Degreaser	12	
Food Grade Air Tool Oil	6	Lectra Clean® Heavy Duty Electrical Parts Degreaser For Energized Equipment	27	T-Force® Next Generation Degreaser	12	
Food Grade Anti-Seize & Lubricating Compound	6	Lectra Force™ Electrical Cleaner	28	<b>U</b>		
Food Grade Belt Dressing	5	<b>M</b>			Ultra-Lite 3-36®	21
Food Grade Chain Lube	5	Mech Force™ Industrial Degreaser	13	<b>W</b>		
Foaming Coil Cleaner	14	<b>N</b>			White Lithium Grease	23
Food Grade Contact Cleaner	10	Natural Degreaser™ Citrus Based Degreaser	13	<b>X</b>		
Food Grade Dielectric Grease	6	NT™ Precision Cleaner	9	XT-2000™ Precision Cleaner	9	
Food Grade Dielectric Grease	6	<b>O</b>			<b>#</b>	
Food Grade Extreme Duty Grease	8	Odor Neutralizer	20	2-26® Multi-Purpose Precision Lubricant	29	
Food Grade Machine Oil	5	OzzyJuice® Degreasing/ Cleaning Solution	20	3-36® Multi-Purpose Lubricant and Corrosion Inhibitor	21	
Food Grade Multi-Purpose Grease	8	OzzyBooster® Microbial Enhancer	20			
Food Grade Penetrating Oil	6					

Visit [crcindustries.com](http://crcindustries.com) or call 800-556-5074 for more information.





800 Enterprise Road, Suite 101 | Horsham, PA 19044  
customercareus@crcind.com | techservice@crcind.com  
800-556-5074



CRC®, Brakleen®, Weld Aid®, Sta-Lube®, K&W®, Marykate®, SmartWasher®, Evapo-Rust®,  
and all products denoted with ® and ™ are trademarks of CRC Industries, Inc.

©2024 CRC Industries, Inc. Printed in USA